


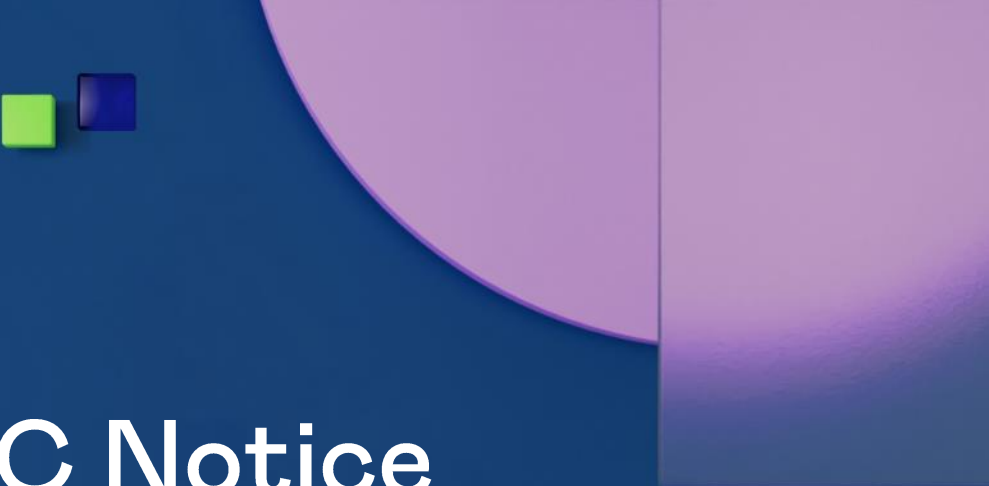

G150XTN03.4 EC Notice

2026/02

G&P BU

Agenda

- Engineering Change Preview
- EC Schedule

Engineering Change Items Preview

Purpose

Level-shifter vendor announced end-of-life plan. Considering supply longevity and stability, ADP's ultimate assessment with new material will lead to change of PCBA layout.

Change Preview


	Change Details	
PCBA	• Change Level-shifter (EOL) • Change PWM/ LED Driver/ DVCOM	
Model Name	Part No. after EC	Part No. before EC
G150XTN03.4	97.15G10.410	97.15G10.404


Engineering Change Schedule

Notes

- Internal reliability verification has been done, and all mandatory items are passed
- 1st EC sample: available by Feb 28th. Suggested verification period: within 6 months
- Recommendation: Implement new level-shifter by “Cut-in”
- The actual cut-in date will depend on the approval release date. Due to the current market shortage of raw materials (such as gold and copper), the expected lead time is 10–12 weeks. Therefore, ADP strongly recommend starting the verification process as early as possible

Schedule

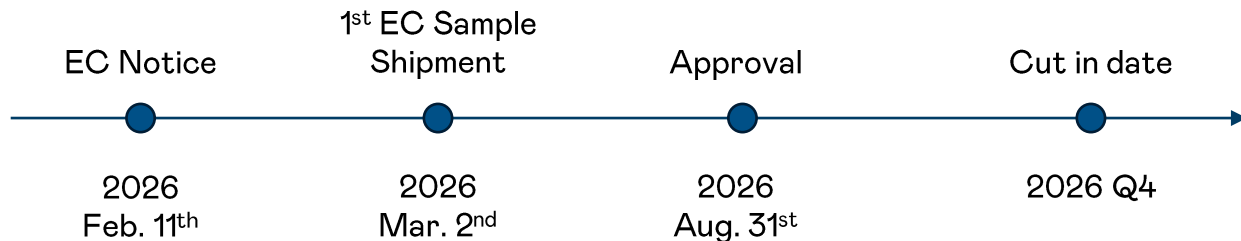

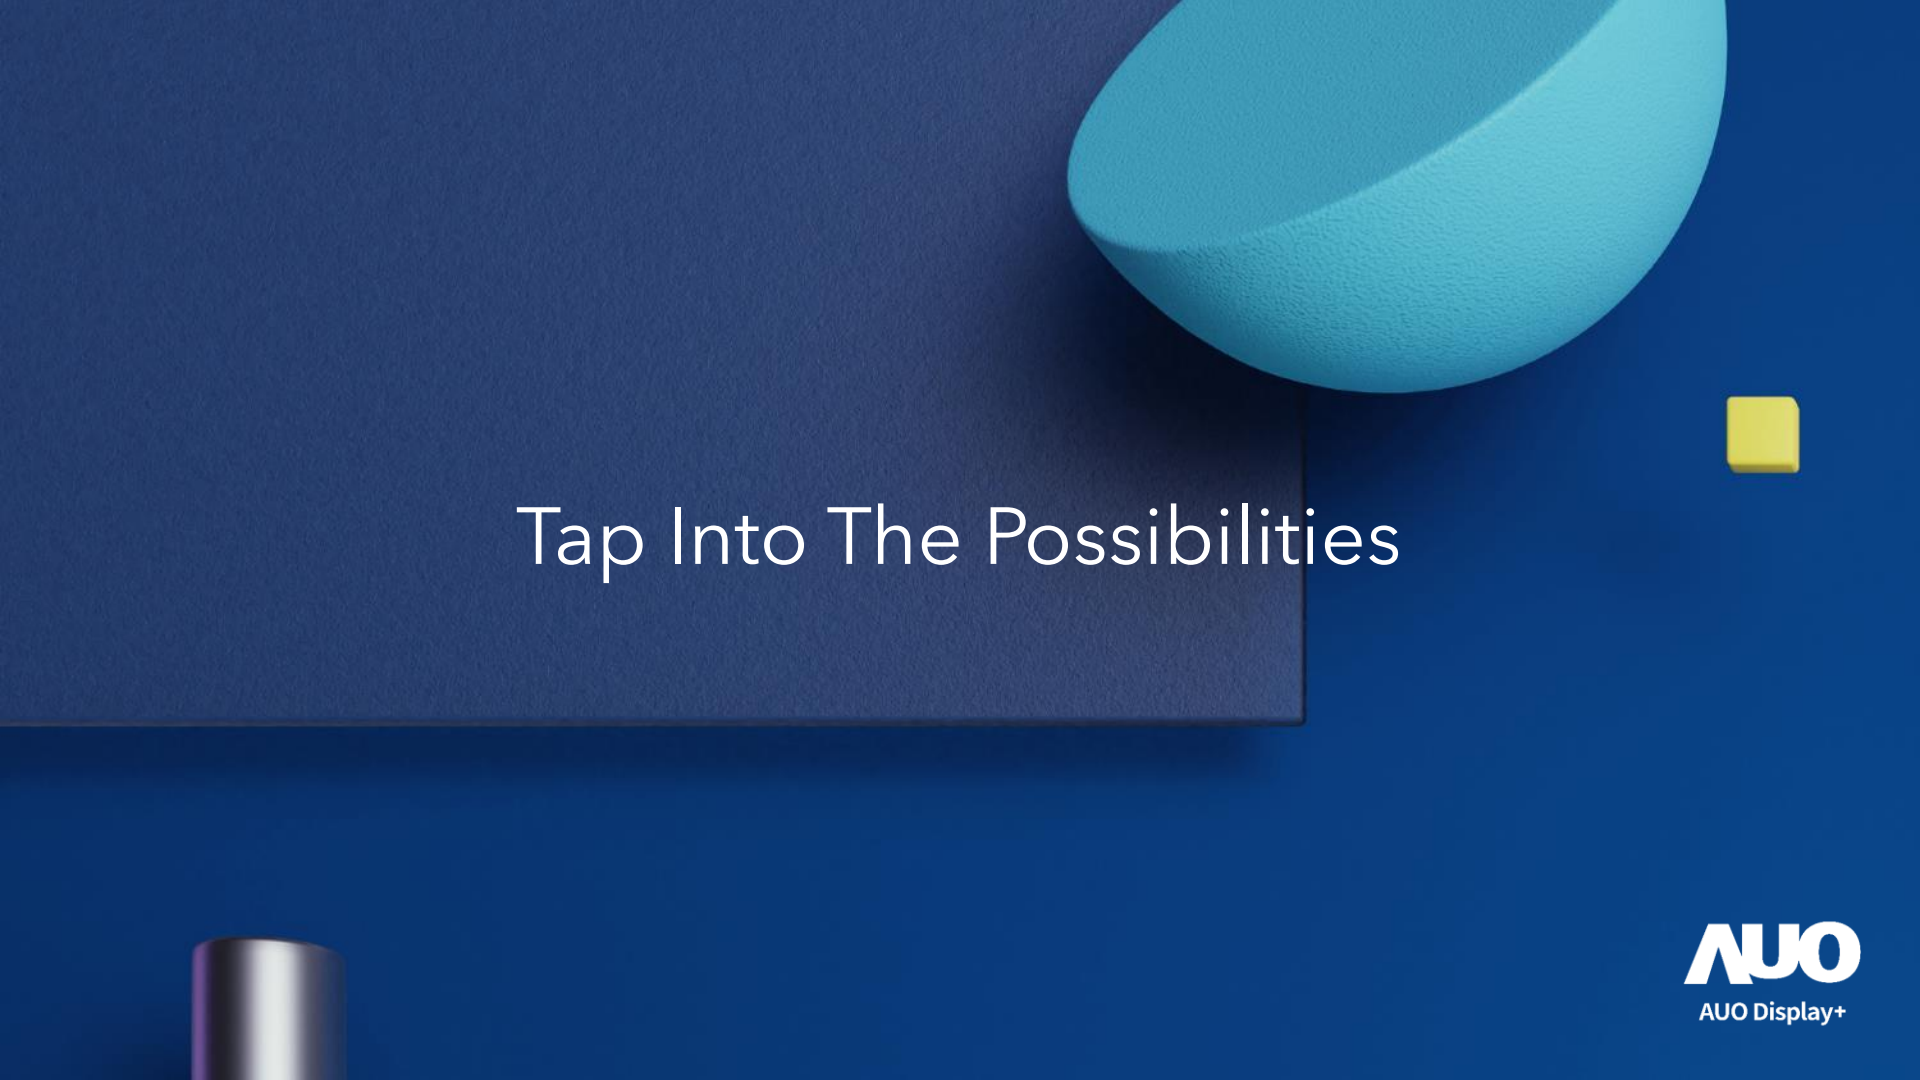

Tap Into The Possibilities